

Model No.: **GP15PL**

NO MERCURY & CADMIUM ADDED	
Description	: Super Heavy Duty Battery, AA Size
Chemical System	: Zinc-Manganese dioxide (Zinc Chloride)
Nominal Voltage	: 1.5 Volts
Battery Dimensions	: Refer to Drawing
Terminals	: Protruded positive (+) and flat negative (-) contacts
Jacket	: Label
Applications	: All electronic devices, e.g. transistor radios, cassette recorders, toys, alarm clocks, portable fans, portable hand-tools.
Effective Period	: 36 months (Storing at -10°C to 25°C and 60±20% RH)
Weight(Reference)	: 14.6g


### Cross References:

GP	JIS	IEC	ANSI
15PL	R6P	R6P	15D


### Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
10 Ohms	1Hr/Day	0.9V	6.5Hrs

10 Ω 1hr/day e. v= 0.9V

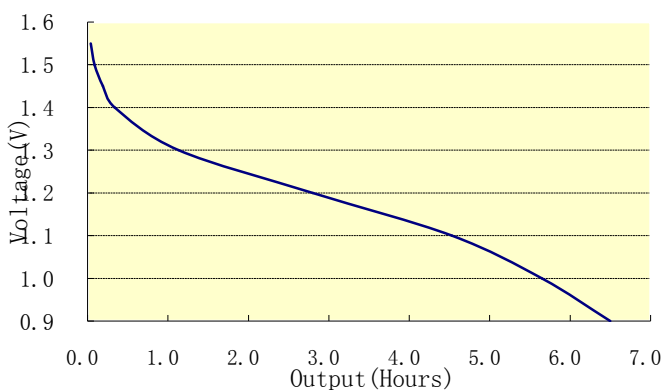

At 20±2°C within 60 days of manufacture

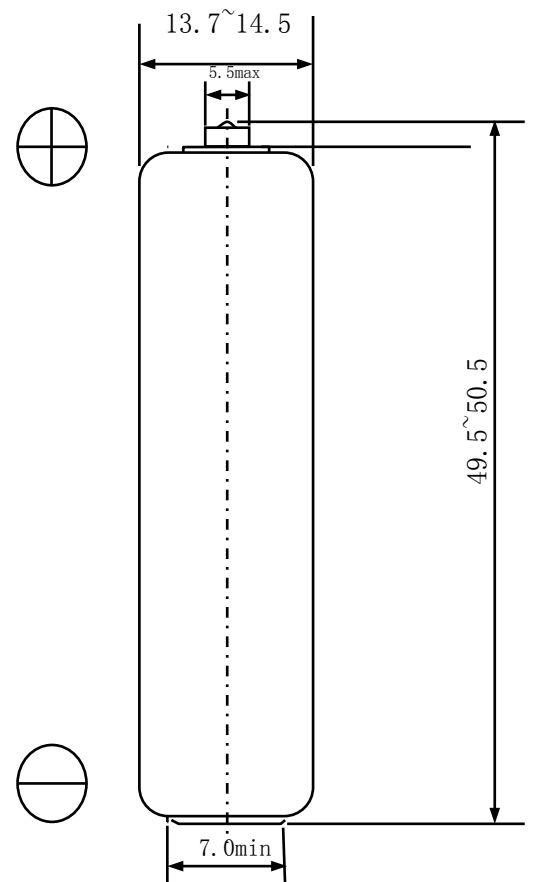

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors